


Attention!!



AUTHOR: Knut O. Malmø	REVISION / DATE: PA1 / 041109	APPROVAL:
--------------------------	----------------------------------	-----------



If you are going to install a G-version of the central unit; please read this page.
If not; skip this page.

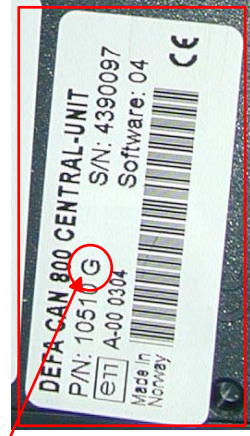


Some F alarm central units have entered the marked as G-versions.
Open the G central unit to decide the real version of the central unit.

Have a look at the marking of the resistors on the picture below.
Marking:


511 => F-version. Follow the installation description for the F-version on the following pages.
332 => G-version. Follow the installation description for the G-version on the following pages.

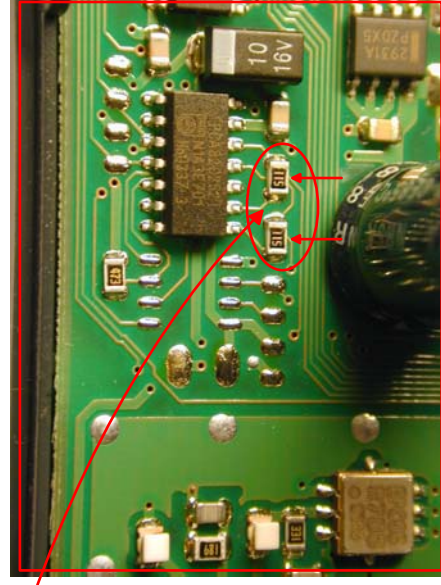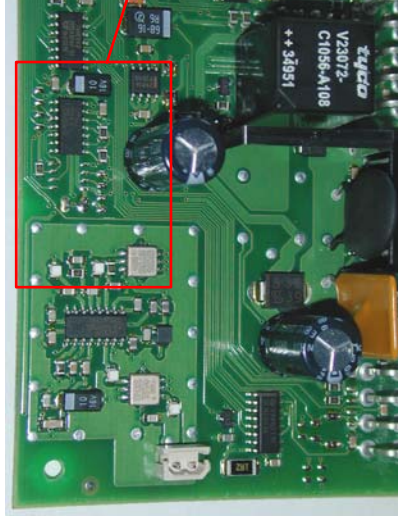


For more information read Technical Message No. 11. 2004. (www.defa.com).

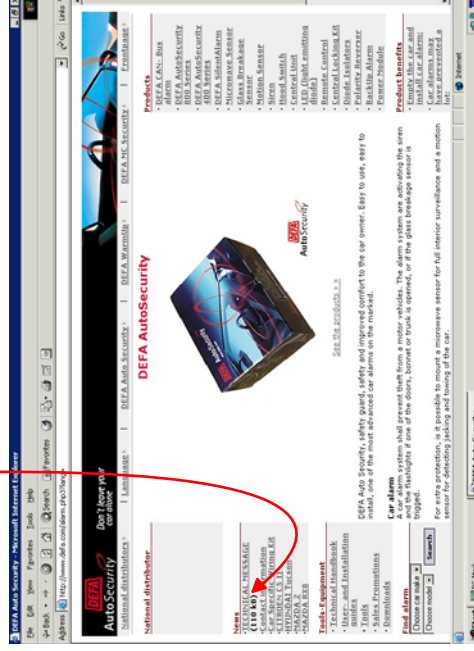

NB! This installation diagram must only be used as a guideline for the installation. Equipment delivered with the car varies considerably from model to model and from market to market. Before starting the installation, be sure to check carefully the original diagram from the car manufacturer. DEFA A.S is not liable to compensate for possible damages that may occur due to faulty or insufficient installation manuals.

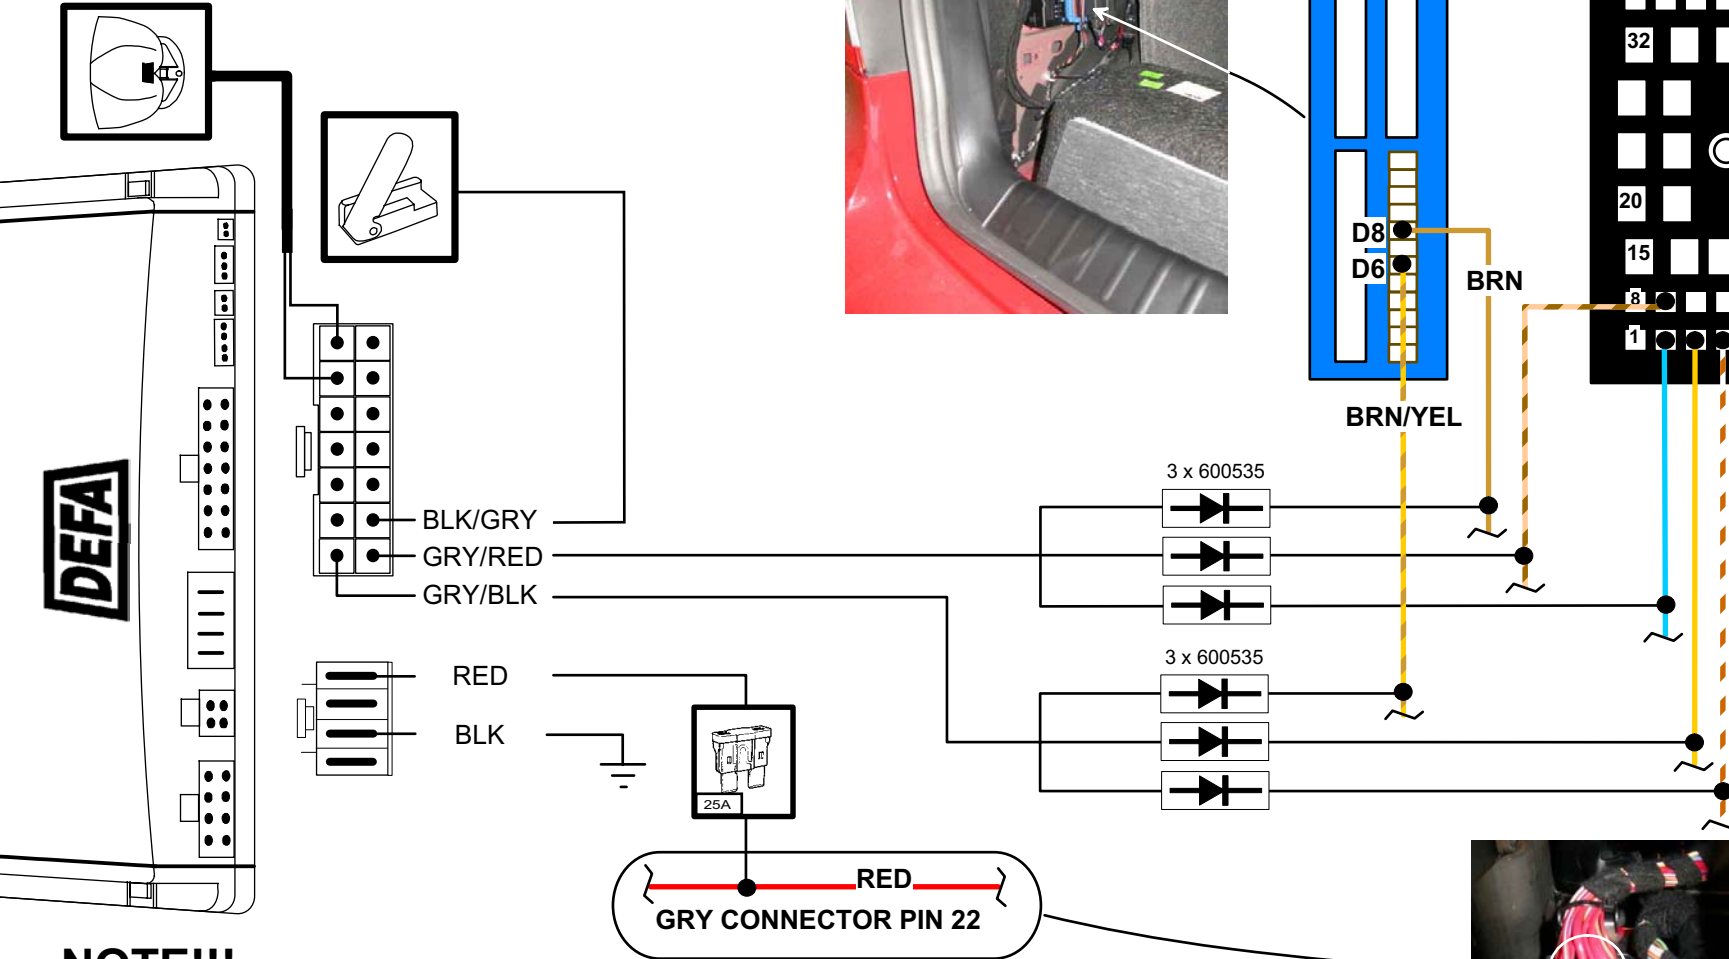

BLU CONNECTOR

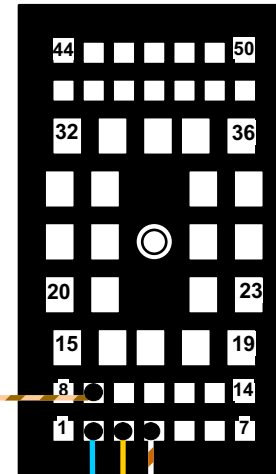

BLK CONNECTOR:
PIN 2: LTBLU (RIGHT FRONT)
PIN 3: YEL (LEFT FRONT)
PIN 4: BRN/WHT (LEFT SIDE)
PIN 9: BRN/LTBRN (RIGHT SIDE)



NOTE!!!


REQUIRED:

- Central unit rev: F
- Software rev: see www.defa.com/flash
- Resistor 180 ohm (1 x 600633)
- Diodes (2 x 600535)

OR:

REQUIRED:

- Central unit rev: G →
- Software rev: see www.defa.com/flash
- Diodes (2 x 600535)



BEHIND FUSE BOX LEFT SIDE DASHBOARD


Date : 2004.05.05

Rev : B

Page: 1 of 3

WITH CENTRAL UNIT REV. F


CONNECTOR P1



ORG/GRN



GRY/BLK 102 PIN CONNECTOR

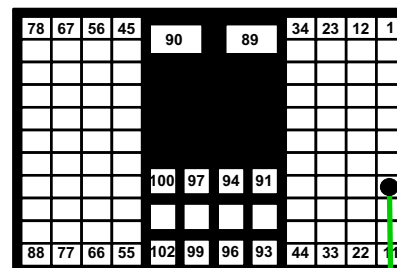


GRN
(pin 8)




WITH CENTRAL UNIT REV. G

CONNECTOR P1



ORG/GRN

GRY/BLK 102 PIN CONNECTOR

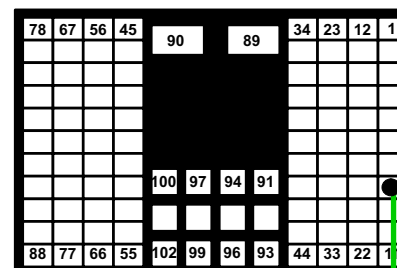

GRN
(pin 8)

